
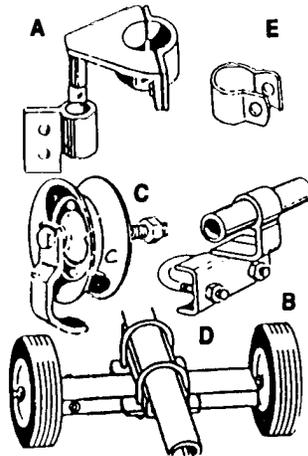


ROLLING GATES

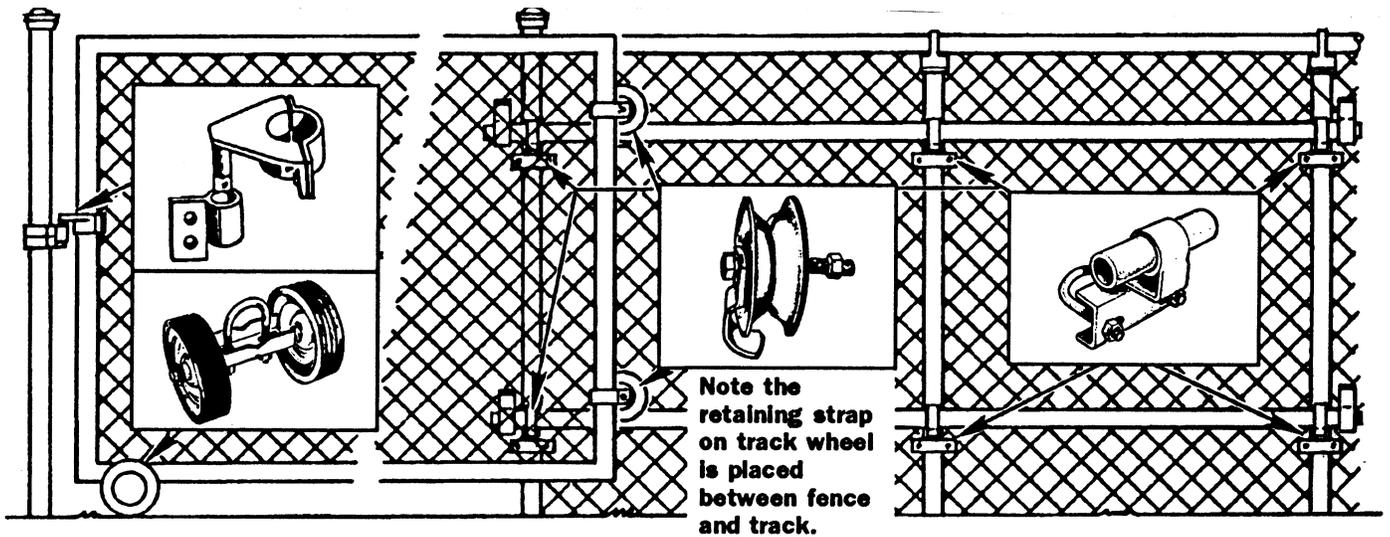

- | |
|---|
| <p>A Locking device
 B Universal track bracket
 C Rear track wheel each
 D Double wheel carrier
 E Rear wheel bracket</p> |
|---|

1) Set the gate opening to the desired size.	7) Attach the double wheel carrier to the bottom of the gate approximately 3" from end.
2) Single Gate: Panels are built 6" wider than the distance between gate posts.	8) Attach the track wheels to the gate frame but leave the wheel clamps loose.
3) Double Gates: Each panel is built 6" wider for a total of 12" wider than the distance between the gate posts.	9) Adjust and align to ensure the ground carrier and track wheels roll smoothly. Now tighten the wheel clamps.
4) Mount the track brackets 8" below the top of the fence and 10" above the ground level.	10) Install the rolling gate latch. Female half to post and male half to gate frame.
5) Mount the end brackets upside down to act as gate stops.	11) It is recommended that safety posts be installed in case gate is accidently dislodged from track.
6) Fit 1 5/8" pipe on track brackets to form continuous track, making sure track is level.	